

OBLIX[™] | PET Acoustical Ceiling Baffle

Distinctive lines create interesting simplicity. Oblix uses diagonal lines to offer a visually bold yet beautifully clean design solution to a variety of spaces – all while improving the acoustics of the space.



Distributed by: WALLWORKS. ACOUSTIC. ARCHITECTURAL. PRODUCTS. INC.

sales@wallworks.com

OBLIX[™]

FEATURES:

- Choice of 354 Colors
- Lightweight and Easy to Handle
- Modern Design
- Excellent Acoustical Values
- Repeatable Pattern

SPECIFICATIONS

Standard Baffle Size (LxWxH): Weight: Fire Rating: 47" x 47" x 12" 16lbs. Class A per ASTM E-84

HARDWARE OPTIONS


Product can be installed with aircraft cable

ACOUSTICAL DATA

Frequency (Hz)	125	250	500	1000	2000	4000	SABINS
Oblix	1.17	11.31	15.60	21.20	28.71	33.39	
Frequency (Hz)	125	250	500	1000	2000	4000	NRC
Oblix	.43	.74	1.02	1.38	1.87	2.18	1.25

Based on Baffle size 4' \times 4' with Type "J" Mounting. Sabins are based on Sabins per Object, NRC is an equivalent number based on one face of one panel

INSTALLATION via Aircraft Cable (see installation document)

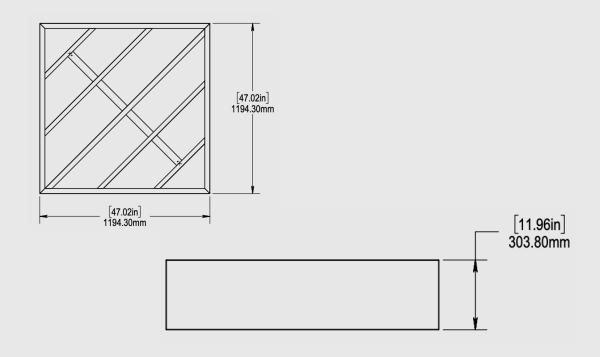



OBLIX[™] | PET Acoustical Ceiling Baffle

FINISHES







Distributed by: WALLWORKS. ACOUSTIC. ARCHITECTURAL. PRODUCTS. INC. sales@wallworks.com

COMPOSITION:

OBLIXTM

- 100% Polyethylene Terephthalate (PET)
- 55% recycled content

ENVIRONMENTAL FACTORS:

- 100% recyclable
- Low VOC Emissions
- LEED MRc4



