

T
E
T
R
I
X

A
I
R



TETRIX AIR™ | PET Polyester Acoustical Panel

Various sized shapes and various depths of the panels allow you to personalize your space and design. These panels have a patent-pending secret access compartment in the front that allows for easy and accurate installation.



POLY-COUSTIX™
BY SOUND SEAL

Distributed by:
WALLWORKS. ACOUSTIC. ARCHITECTURAL. PRODUCTS. INC.
sales@wallworks.com

TETRIX AIR™

FEATURES:

- Quick and Easy Installation with Hidden Access Panel
- Acoustical Felt
- Core designed with Air Cavity for Maximum Sound Absorption
- Choice of 34 Colors
- Multiple Size Configurations


SPECIFICATIONS

Panel Sizes:	10-1/2" x 10-1/2"
	21" x 10-1/2"
	21" x 21"
	42" x 21"
	42" x 42"
Thickness Options:	27mm, 36mm
Weight:	27mm: .30 lbs/SF, 36mm: .41 lbs/SF
Fire Rating:	Class A per ASTM E-84

ACOUSTICAL DATA

Frequency (Hz)	125	250	500	1000	2000	4000	NRC
27mm Thickness	.06	.12	.28	.61	.91	.99	.50

Tested as Type "A" Mounting

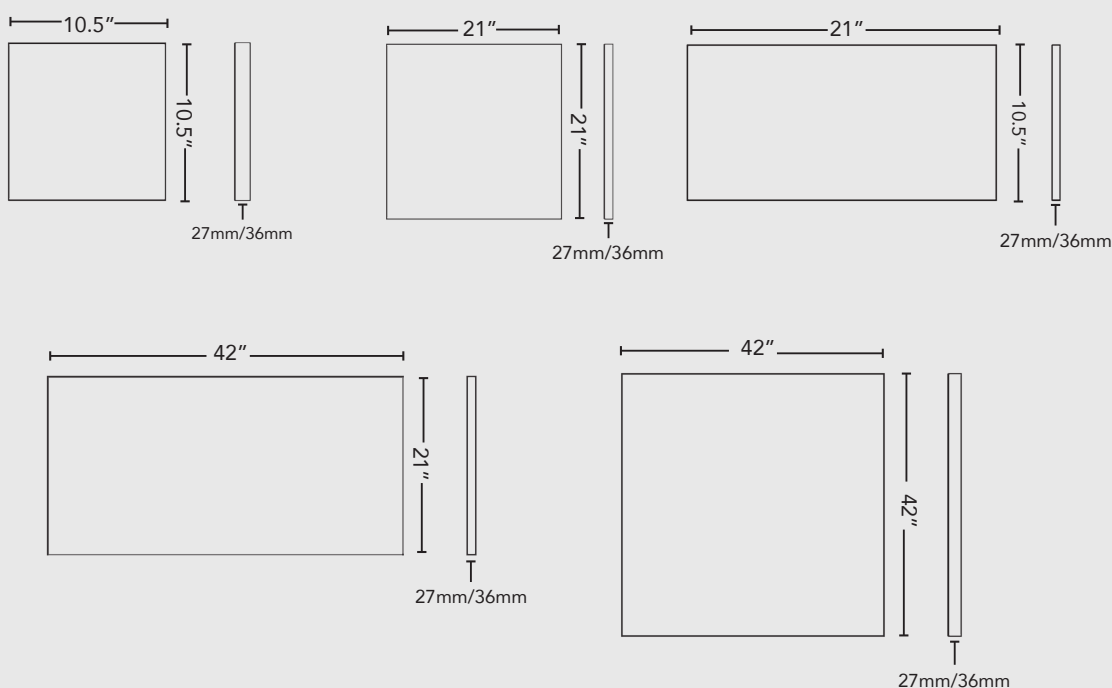

POLY-COUSTIX™
BY SOUND SEAL

Distributed by:
WALLWORKS. ACOUSTIC. ARCHITECTURAL. PRODUCTS. INC.
sales@wallworks.com

TETRIX AIR™ | PET Polyester Acoustical Panel

FINISHES



TETRIX AIR™

COMPOSITION:

- 100% Polyethylene Terephthalate (PET)
- 55% recycled content

ENVIRONMENTAL FACTORS:

- 100% recyclable
- Low VOC Emissions
- ASTM - D5116
- LEED - MRc4

