


SPEC DATA SHEET SQ-130



- Excellent acoustical performance
- Class A fire rated per ASTM E-84
- Type A mount (wall panels),
   Type E-400 mount (ceiling tiles)
- Custom sizes and shapes

DISTRIBUTED IN CANADA BY
WALLWORKS.ACOUSTIC
ARCHITECTURAL.PRODUCTS.INC
SALES@WALLWORKS.COM

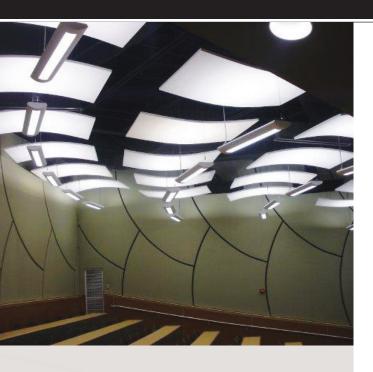

50 H.P. Almgren Drive Agawam, MA 01001 www.soundseal.com

# **CHROMA®**

# **ACOUSTICAL WALL & CEILING PANELS**

Sound Quality S-2000 panels with Chroma finish are the perfect solution where a traditional fabric finish is not desired. The acoustically transparent, paintable finish blends well with finished drywall to create a space absent of echo and reverberation. Rather than a textured finish of fabric, Chroma panels provide for an understated, more discreet acoustic finish within a space.

Chroma finish by Sound Seal is part of a Class A rated system tested per ASTM E-84. In standard Signature White or any Pantone color, Sound Quality Chroma finished panels provide absorption required to create an acoustically correct space. Available in 1" and 2", Sound Quality S-2000 panels in Chroma finish provide a range of NRC values suited to any acoustical solution.

#### **APPLICATIONS**

- Schools/Universities
- Auditoriums
- Houses of worship
- Office spaces

### **ACOUSTICAL DATA**

Sound Absorption Coefficients								
Octave Band Frequencies	125	250	500	1000	2000	4000	NRC	SAA
1" Wall Panel	0.01	0.24	0.71	0.99	1.06	1.05	0.75	0.76
2" Wall Panel	0.30	0.85	1.09	1.05	0.99	1.01	1.00	0.99
1" Ceiling Tile	0.80	0.89	0.82	0.96	1.03	1.10	0.95	0.95
2" Ceiling Tile	0.80	0.83	0.99	1.04	1.02	0.98	0.95	0.98

## **SPECIFICATIONS**

Specifications can be downloaded from www.soundseal.com or call us at 413.789.1770

#### CHROMA-PERMEABLE PAINT

Chroma Paintable Panels offers a breathable paint to apply to your Chroma Paintable Panels. Our paint is offered in all Pantone colors and should be applied as recommended in our field painting instructions or call 413.789.1770.

